

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 826.1546/JDH

First Named Inventor or Application Identifier:

Hiroaki TAKEBE, et al.

Express Mail Label No.

Only for new nonprovisional applications under 37 CFR 1.53(b))

 JCS11 U.S. PTO
 09/30/98
 05/11/99

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

 ADDRESS TO: Assistant Commissioner for Patents
 Box Patent Application
 Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 40]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 17]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ ~~DELETION OF INVENTOR(S)~~
 Signed statement attached deleting inventor(s) named in the prior application,
 see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
 The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: /

18. CORRESPONDENCE ADDRESS

 STAAS & HALSEY
 Attn: James D. Halsey, Jr.
 700 Eleventh Street, N.W., Suite 500
 Washington, DC 20001

 Telephone: (202) 434-1500
 Facsimile: (202) 434-1501

 JCS11 U.S. PTO
 05/11/99

09/30/98 05:11:09

0300894-051199

APPLICATION FOR
UNITED STATES LETTERS PATENT
SPECIFICATION

Inventor(s): Hiroaki TAKEBE, Yoshinobu HOTTA
and Satoshi NAOI

Title of the Invention: WORD RECOGNIZING APPARATUS FOR
DYNAMICALLY GENERATING FEATURE
AMOUNT OF WORD AND METHOD THEREOF

**WORD RECOGNIZING APPARATUS FOR DYNAMICALLY GENERATING
FEATURE AMOUNT OF WORD AND METHOD THEREOF**

Background of the Invention

5 Field of the Invention

The present invention relates to a pattern
recognizing method in which a pattern string is
collectively recognized, and more particularly to a
10 word recognizing apparatus for collectively
recognizing a word and the method thereof.

Description of the Related Art

Conventional methods of pattern recognition are
15 classified into the following three groups from the
viewpoint of character division and extraction.

In the first method, a word is divided and
extracted using its image features in units of
characters, and the divided and extracted characters
20 are individually recognized. Main image features
include the blank and pitch between characters, a
histogram obtained by projecting an image in the
direction perpendicular to a character string, the
circumscribed rectangle of the joint component of
25 pixels, the unevenness of the upper and lower contours

of an image, etc.

In the second method, a plurality of division and extraction hypotheses are developed, and each hypothesis is verified using the result of character recognition. In one case, the extraction and division hypothesis can be obtained by moving an observation window in the image, and in the other case, the extraction and division hypothesis can be obtained by using the image features described above. For verification a dynamic programming (DP) is often used to obtain complete consistency.

However, since in the case of a handwritten character string which is written with no restriction, pitch between characters is not uniform and the image features of parts to be extracted are diverse, the method has a problem in that characters cannot be divided and extracted satisfactorily. In the case where characters are searched using the observation window also, characters cannot be handled by a fixed window since pitch is not uniform. However, if the size of the window is made variable, the process time increases greatly.

Furthermore, since the image features of a part to be divided and extracted are peculiar to character types, such as kanji, hiragana, alphabets and numeric

characters, the same problem also occurs in the case of a word composed of printed characters when touched characters are separated, if these different types of characters are mixed.

5 In the third method, a word itself is recognized without dividing the word in units of characters and extracting the characters. According to this method, although the difficult problem of character division and extraction can be avoided, this method has a
10 problem that the number of candidates to be registered in a recognition dictionary in advance increases rapidly compared with the case where each individual character is recognized. Actually, since the size of the dictionary is restricted to a practical level due
15 to memory capacity, only a limited number of words can be registered, and thereby its usage is restricted.

Summary of the Invention

20 It is an object of the present invention to provide a word recognizing apparatus for collectively recognizing a word with as little restriction as possible on the recognizable scope of words.

25 In the first mode of the present invention, a word recognizing apparatus comprises a list unit, a dictionary unit, a generating unit and a collating

unit. The list unit stores a list of one or more words, and the dictionary unit stores the feature amount of characters. The generating unit generates the feature amount of a word stored in the list unit
5 using the feature amounts of characters stored in the dictionary unit. The collating unit collates the generated feature amount of a word with the feature amount of a recognition target, and outputs its recognition result.

10 In the list stored in the list unit, candidate words to be recognized as a result are registered, and in the dictionary unit, the feature amounts of individual characters composing these words are registered. The generating unit refers to the list in
15 the list unit, extracts the feature amount of each of the characters composing a word from the dictionary unit, and composes the feature amount of the word. The collating unit collates the feature amount composed by the generating unit with the feature amount of the
20 recognition target contained in an input image, calculates the degree of similarity between the two feature amounts, etc., and outputs it as its recognition result.

25 In the second mode of the present invention, a word recognizing apparatus comprises a generating unit

and a collating unit. The generating unit dynamically generates the feature amount of a word using the feature amounts of its characters. The collating unit collates the generated feature amount of the word with the feature amount of a recognition target, and outputs its recognition result.

In the third mode of the present invention, a recognizing apparatus comprises a generating unit and a collating unit. The generating unit dynamically generates the feature amount of a pattern string using the feature amounts of patterns. The collating unit collates the generated feature amount of the pattern string with the feature amount of a recognition target, and outputs its recognition result.

Brief Description of the Drawings

Fig. 1 shows the principle of a word recognizing apparatus of the present invention.

Fig. 2 shows the configuration of a word recognizing apparatus.

Fig. 3 is a flowchart showing the process of a feature extracting unit.

Fig. 4 shows the relationship between the positions of contour points and direction codes.

Fig. 5 shows 16 direction codes.

Fig. 6 shows how to determine 16 direction codes.

Fig. 7 shows a one-dimensional Gaussian distribution type filter.

5 Fig. 8 shows a basic mesh division and the center position of a mask.

Fig. 9 shows a direction code histogram series.

Fig. 10 shows the composition of the feature amount.

10 Fig. 11 is a flowchart showing the processes of both a feature collating unit and a feature generating unit.

Fig. 12 shows DP matching.

Fig. 13 shows a DP matching process.

Fig. 14 shows an example of an image.

15 Fig. 15 shows an example of a feature collation process.

Fig. 16 shows the configuration of an information processing device.

Fig. 17 shows storage media.

20

Description of the Preferred Embodiment

The detailed preferred embodiment of the present invention is described below with reference to the drawings.

25 Fig. 1 shows the principle of a word recognizing

apparatus of the present invention. A word recognizing apparatus shown in Fig. 1 comprises a list unit 1, a dictionary unit 2, a generating unit 3 and a collating unit 4.

5 The list unit 1 stores a list of one or more words, and the dictionary unit 2 stores feature amounts of characters. The generating unit 3 generates the feature amount of a word stored in the list unit 1 using the feature amounts of characters stored in
10 the dictionary unit 2. The collating unit 4 collates the generated feature amount of the word with the feature amount of a recognition target, and outputs its recognition result.

15 In the list stored in the list unit 1, candidate words to be recognized as a result are registered, and in the dictionary unit 2, the feature amounts of individual characters composing these words are registered. The generating unit 3 refers to the list
20 in the list unit 1, extracts the feature amount of each of the characters composing a word from the dictionary unit 2, and composes the feature amount of the word. The collating unit 4 collates the feature amount composed by the generating unit 3 with the feature amount of the recognition target contained in
25 an input image, calculates the degree of similarity,

etc., between the two feature amounts, and outputs it as its recognition result.

In this way, by dynamically generating the feature amounts of only candidate words in the course of a recognizing process, and not by preparing in advance a word dictionary in which there are the feature amounts of many words, the amount of memory to be used can be reduced. Since there is no need to register the feature amounts of words in the list, many words can be registered in the list, and thereby the feature amounts of these words can be generated on occasion. For this reason, the scope of words can not be restricted as in a conventional word dictionary.

For example, the list unit 1, the dictionary unit 2, the generating unit 3 and the collating unit 4 shown in Fig. 1 correspond to a word list 14, an individual character dictionary 15, a feature generating unit 13 and a feature collating unit 12, respectively, shown in Fig. 2 and described later.

In the following descriptions, a case where character strings contained in an image to be recognized are horizontal is assumed in order to simplify the descriptions. Characters are horizontally connected, and words are also written horizontally.

However, the present invention can also be applied to a case where character strings are vertical and characters are vertically connected.

5 The word recognizing apparatus in this embodiment dynamically generates a word dictionary from a dictionary of individual characters, and collectively recognizes a word. A key point in realizing such a word recognizing apparatus is to determine the feature amounts and a method of composing them in such a way
10 that the feature amount obtained from a word image may match the composed feature amount of each of the characters composing the word.

In the individual character dictionary, the feature amounts of individual characters are
15 registered, and by mixing feature amounts of individual characters, the feature amount of a corresponding word is generated. It is assumed here that a word X ("AB") is composed of characters A and B, the images of characters A and B and the word X are
20 images a, b and x, respectively, and the feature amounts obtained from those images are α , β and χ , respectively.

At this time, in order to generate the feature amount of a word from the feature amounts of its
25 individual characters, a composition operation f has

to be defined between two feature amounts, and $\chi = f(\alpha, \beta)$ has to hold true. That such a condition holds true is assumed to mean that operation f is commutative for the ordinary composition of an image.

5 The feature amount of characters and words conventionally used is gradated in order to avoid the shift and deformation of characters. In the gradating process, an image is divided by a predetermined number of meshes, and a direction code histogram in each of
10 the small obtained areas is weighted and added to that of a small area surrounding it. Since by this gradating process, information relating to the small surrounding areas is introduced into a small area, the shift of characters and deformation of their styles
15 can be absorbed.

 However, if such a gradating process is applied to a word, the direction code histogram of one character is weighted and added to that of the other on the boundary of two characters, and a commutative
20 composition operation f is not easily found.

 Under these circumstances, in this embodiment a conventional gradating process using Gaussian distribution, etc., is applied to the vertical direction which is perpendicular to the connecting
25 direction of characters, but no gradation is applied

to the horizontal direction which is the connecting direction of characters. In this way, the feature amount is generated.

5 If the feature amount is applied to a word written horizontally, the direction code histogram of one character is not weighted and added to that of the other on the boundary between two characters, and a commutative composition operation f is easily obtained by simply arranging two feature amounts of characters.

10 However, in this situation the shift and deformation of characters are not taken into consideration. Therefore, when a distance between an image and a candidate to be recognized is calculated, its recognition accuracy is arranged to be improved using

15 DP matching.

The conventional feature amount of a character can be obtained by dividing an image by a predetermined number of meshes. If this mesh-division is applied to a word with a plurality of characters,

20 the more characters are contained in the word, the larger the meshes become. For this reason, if the resolution of the meshes becomes relatively low, the recognition accuracy will be affected.

Therefore, in this embodiment the number of

25 meshes is changed according to the length of a word.

Since in the case of a word horizontally written the vertical length of an image is fixed even if the number of characters increases, the vertical length of the image is divided by a predetermined number and the obtained quotient is designated as the size of a basic mesh. Mesh-division is performed horizontally and vertically based on the size. In this case, the number of horizontal meshes varies depending on the horizontal length of the image. However, since DP matching is used in the calculation of the distance, uncertainty due to the change in the number of meshes is absorbed.

The description on the feature amount of a word vertically written can be obtained by replacing the word "horizontal" with the word "vertical" in the above description on the feature amount of a word written horizontally.

Fig. 2 shows the configuration of the word recognizing apparatus of this embodiment. The word recognizing apparatus shown in Fig. 2 comprises a feature extracting unit 11, a feature collating unit 12, a feature generating unit 13, a word list 14 and an individual character dictionary 15.

The feature extracting unit 11 extracts the feature amount from a given image, and the feature

generating unit 13 composes the feature amount of a candidate word to be recognized, and is stored in the word list 14. The feature collating unit 12 collates the feature amount extracted by the feature extracting unit 11 with the feature amount of a word generated by the feature generating unit 13 using the feature amounts of words generated by the feature generating unit 13 as a word dictionary, and outputs a word that has the closest feature amount as the first candidate of the recognition result.

At this time, although it is desirable for the word list 14 to contain the word indicated by an image to be recognized, the process often become complicated if there are too many words. Therefore, several word lists 14 are prepared in advance, the feature generating unit 13 estimates a word list 14 with a high possibility of containing a word to be recognized according to the previous recognition result, and uses it.

For example, when the image of an address in a letter written in Japanese is processed, it is judged that there is a high possibility that a name of a city, town or village will appear if the immediately preceding recognition result was a name of a prefecture such as "Tokyo" or "Hokkaido", and thus a

word list 14 containing names of cities, towns and villages is selected, and the feature amount of a word is composed.

Next, the process of the feature extracting unit 11 is described with reference to Figs. 3 to 9. Fig. 3 is a flowchart showing the process of the feature extracting unit 11. This is a process obtained by adding a new part to a process described in a paper, Shinji Tsuruoka et al., "Handwritten "KANJI" and "HIRAGANA" Character Recognition Using Weighted Direction Index Histogram Method," Journal of the Institute of Electronic Information and Communication (D), Vol. J70-D, No. 7, pp. 1390-1397, July 1987.

The feature extracting unit 11 first inputs an image to be recognized (step S1), and generates a direction code vector field (step S2). Then, the unit 11 performs the basic mesh-division of the image and generates a direction code histogram vector field (step S3), and performs a vertical gradating conversion using a one-dimensional Gaussian distribution function (step S4). Then, the unit 11 compresses the vector of the direction code histogram vector field (step S5), extracts the feature amount, and terminates the process.

In step S2, the feature extracting unit 11 first

performs the eight-connection contour trace of the input image, and designates the obtained contour point series result as $\{C_i\}$. Here, C_i corresponds to a pixel on the contour of a pattern contained in the image.

5 Then, the unit 11 determines a direction code d_i with eight directions on the contour point C_i , based on the position of the contour point C_{i+1} subsequent to it.

Fig. 4 shows the relationship between the position of contour point C_{i+1} with contour point C_i as a center and a direction code. For example, C_{i+1} is positioned on the right of C_i ($d_i = 1$), C_{i+1} is positioned on the upper right of C_i ($d_i = 3$), and C_{i+1} is positioned above C_i ($d_i = 5$).

10

Then, by averaging a direction code d_i at C_i and a direction code d_{i-1} at a contour point C_{i-1} immediately preceding C_i , a direction code D_i with 16 directions at C_i , as shown in Fig. 5, can be obtained.

15

For example, if contour points C_{i-1} , C_i and C_{i+1} are positioned as shown in Fig. 6, $d_{i-1} = 13$ since C_i is positioned under C_{i-1} , and $d_i = 11$ since C_{i+1} is positioned at the lower left of C_i . Therefore, the direction code with 16 directions $D_i = ((d_{i-1}) + d_i)/2 = 12$. This direction code indicates an intermediate direction between the direction of a direction code

20

25 13 and that of a direction code 11. Generally

speaking, if a direction code D_i is an odd number, it indicates one of eight directions, as shown in Fig. 4, and if it is an even number, it indicates an intermediate direction between two adjacent directions.

Then, a 16-value vector is allocated to the points (pixels) of an image. Here, a 0 vector with all of the 16 elements set to 0 is allocated to points other than contour points. As for the contour point C_i , a vector with the D_i -th element set to 1 and other elements set to 0 is allocated. The vector field consisting of these 16-value vectors is called a direction code vector field.

For example, the direction code vector at a contour point C_i shown in Fig. 6 is as follows.

(0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0)

In step S3, the feature extracting unit 11 first divides the vertical length y of an image by a predetermined integer M , and designates the quotient L as the size of a basic mesh. Then, the unit 11 designates the quotient obtained by dividing the horizontal length X of the image by L , as n , and divides the entire image by $M \times n$ pieces of mesh. According to such a mesh-division, the number of meshes varies depending on the horizontal length, and

meshes with a constant size can be obtained.

Then, in each of the obtained meshes a histogram with a direction code D_i is drawn up, provided however, that all the weight coefficients of the histogram are 1. This histogram is generated by adding the direction code vectors of points contained in the mesh, and is indicated by a 16-value vector. Then, it is assumed that this is called a direction code histogram vector, and a vector field consisting of direction code histogram vectors of all meshes is called a direction code histogram vector field. For example, from the following four direction code

vectors,

(1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0)

(0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0)

(0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0)

(0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0)

the following direction code histogram vector is obtained.

(1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 3, 0, 0, 0, 0)

In step S4, the feature extracting unit 11 performs only a vertical gradating conversion using a one-dimensional Gaussian distribution function. Here, for example, a one-dimensional Gaussian distribution type filter consisting of five weights,

as shown in Fig. 7, is generated and is applied to the direction code histogram vectors of five meshes arranged vertically.

Thus, the elements of five direction code
5 histogram vectors are weighted and added according to a Gaussian distribution to generate a new direction code histogram vector. Then, the direction code histogram vector of a mesh positioned in the center is updated by the generated direction code histogram
10 vector.

In this way, by performing only a vertical
gradating conversion using a one-dimensional Gaussian distribution type filter, the vertical shift and deformation of characters can be absorbed. As to the
15 horizontal direction which is the connecting direction of characters, direction code histogram vectors are not weighted and added, and the feature amounts are not mixed on the boundary between two characters. Therefore, the commutative composition operation f
20 described above can be easily defined as described later.

Here, if an integer m , such that $m < M$, is determined in advance and m pieces of mesh are selected as the center positions of the filter out of
25 M pieces of vertical mesh, an $M \times n$ direction code

histogram vector field can be space-information-compressed into an $m \times n$ direction code histogram vector field.

For example, when $M = 13$ and $n = 13$, the image is divided into 13×13 meshes as shown in Fig. 8. Here, if $m = 7$ and meshes marked by 0 are selected as the center positions of the filter, the 13×13 direction index histogram vector field is space-information-compressed into a 7×13 direction code histogram vector field.

In step S5, the feature extracting unit 11 direction-compresses the vector of a direction code histogram vector field. First, the unit 11 multiplies the values of two elements immediately preceding and following each of the elements corresponding to direction codes 1, 3, 5, 7, 9, 11, 13 and 15 out of the 16 elements of the direction code histogram vector by 0.5, and adds two multiplication results to the value of the element between them. Then, the unit 11 compresses the 16-value vector into an eight-value vector by deleting elements corresponding to direction codes 2, 4, 6, 8, 10, 12, 14 and 16. The remaining eight elements correspond to the eight directions shown in Fig. 4.

Then, the unit 11 handles all two-element sets

of opposite directions out of the eight vector elements as one element, and adds the values of elements corresponding to the direction codes 9, 11, 13 and 15 to the values of elements corresponding to direction codes 1, 3, 5 and 7, respectively. Thus, an eight-value vector is compressed into a four-value vector. Accordingly, a direction code histogram vector field consisting of $m \times n$ pieces of four-value vector can be obtained.

Here, if n pieces of a four-value vector horizontally arranged are taken as a direction code histogram series, m pieces of a direction code histogram series are to be obtained. The feature extracting unit 11 outputs these m pieces of a direction code histogram series as the feature amount of the image.

For example, if a direction code histogram vector is generated based on the space information compression as shown in Fig. 8, 7 pieces of a direction code histogram series, as shown in Fig. 9, can be obtained. In Fig. 9, a_{ij} ($i = 1, 2, \dots, 7$, $j = 1, 2, \dots, 13$) indicates a four-value vector, and v_i ($i = 1, 2, \dots, 7$) indicates a direction code histogram series.

Next, the word dictionary generating process of

the feature generating unit 13 is described. It is assumed here that I pieces of word lists $\delta_1, \delta_2, \dots, \delta_I$ are prepared as the word list 14 and the i -th word list δ_i contains only the IDs of words and the IDs of characters composing the words. However, the IDs of characters are also registered in the individual character dictionary 15 and are referenced when the feature amount of the word is generated.

When the word list δ_i to be processed is designated by the feature collating unit 12, the feature generating unit 13 refers to the individual character dictionary 15 for each word contained in it, based on the IDs of its component characters, and generates the feature amount of the word.

It is assumed here that a word w is composed of characters c_1, c_2, \dots, c_K and the feature amount of the i -th character c_i is Λ_i . The feature amount of each character is generated in advance by the same process as described above for the extraction of the feature amount, and is stored in the individual character dictionary 15 together with its ID. At this time, the feature amount Λ_w of the word w is defined using $\Lambda_w = \sum \Lambda_i$ where $\sum \Lambda_i$ indicates the sum of K feature amounts $\Lambda_1, \Lambda_2, \dots, \Lambda_K$, and the sum $\Lambda_1 + \Lambda_2$ of two feature amounts Λ_1 and Λ_2 is defined by the

following composition operation.

It is assumed here that $\Lambda_1 = (\lambda_{11}, \lambda_{12}, \dots, \lambda_{1m})$ and $\Lambda_2 = (\lambda_{21}, \lambda_{22}, \dots, \lambda_{2m})$ using m pieces of direction code histogram series λ_{1i} and λ_{2i} ($i = 1, 2, \dots, m$). At this time, $\Lambda_1 + \Lambda_2 = (\lambda_{11}\lambda_{21}, \lambda_{12}\lambda_{22}, \dots, \lambda_{1m}\lambda_{2m})$ using m pieces of direction histogram series $\lambda_{1i}\lambda_{2i}$.

Here, $\lambda_{1i}\lambda_{2i}$ indicates a new direction code histogram series generated by arranging the direction code histogram series λ_{2i} after the direction code histogram series λ_{1i} as it is. If each of λ_{1i} and λ_{2i} consists of n pieces of a four-value vector, $\lambda_{1i}\lambda_{2i}$ consists of $2n$ pieces of a four-value vector.

For example, if $m = 7$ and $n = 13$, the feature amounts Λ_1 , Λ_2 and $\Lambda_1 + \Lambda_2$ are as shown in Fig. 10. In Fig. 10, the direction code histogram series λ_{1i} ($i = 1, 2, \dots, 7$) of Λ_1 consists of 13 pieces of four-value vector a_{ij} ($j = 1, 2, \dots, 13$), and the direction code histogram series λ_{2i} ($i = 1, 2, \dots, 7$) of Λ_2 consists of 13 pieces of four-value vector b_{ij} ($j = 1, 2, \dots, 13$).

$\Lambda_1 + \Lambda_2$ is generated by horizontally arranging Λ_1 and Λ_2 as they are, and its direction code histogram series $\lambda_{1i}\lambda_{2i}$ ($i = 1, 2, \dots, 7$) consists of 26 pieces of four-value vector c_{ij} ($j = 1, 2, \dots,$

collating unit 12.

Then, the feature collating unit 12 collates the feature amount of the image inputted from the feature extracting unit 11 with the feature amount of the i -th word inputted from the feature collating unit 12 in a memory, and calculates a distance (degree of similarity) between the two feature amounts (step S15).

Then, the feature collating unit 12 releases the memory area storing the feature amount of the i -th word (step S16), increments i by one (step S17), and repeats the processes in and after step S12. Since the memory area is cleared in step S16, the feature amount of the $(i+1)$ -th word can be written there, and thereby memory space can be saved. When in step S12, i reaches S , the unit 12 terminates the process.

In step S15, in order to absorb the horizontal shift and deformation of characters, the feature collating unit 12 performs the following distance calculation. First, it is assumed that the feature amount of an input image is $N = (v_1, v_2, \dots, v_m)$ and the feature amount of a word to be compared is $\Lambda = (\lambda_1, \lambda_2, \dots, \lambda_m)$, provided however, that v_i and λ_i ($i=1, 2, \dots, m$) are the direction code histogram series as shown in Fig. 9. At this time, the distance $D(N,$

Λ) between two feature amounts N and Λ is expressed as follows.

$$D(N, \Lambda) = \Sigma D(v_i, \lambda_i) \quad (1)$$

where $\Sigma D(v_i, \lambda_i)$ is the sum of the distance $D(v_i, \lambda_i)$ between two direction code histogram series v_i and λ_i , with respect to it.

A direction code histogram series is a four-value vector series as described above. If the direction code histogram is discomposed into vector elements, it can be considered to be four numerical series. If the j -th numerical series of the direction code histogram series v_i is assumed to be $v_i(j)$ ($j = 1, 2, 3$ and 4), they are expressed as follow.

$$\begin{aligned} v_i &= (v_i(1), v_i(2), v_i(3), v_i(4)), \\ \lambda_i &= (\lambda_i(1), \lambda_i(2), \lambda_i(3), \lambda_i(4)) \end{aligned} \quad (2)$$

At this time, $D(v_i, \lambda_i)$ is expressed as follows.

$$D(v_i, \lambda_i) = \Sigma D(v_i(j), \lambda_i(j)) \quad (3)$$

where $\Sigma D(v_i(j), \lambda_i(j))$ is the sum of the distance $D(v_i(j), \lambda_i(j))$ between two numerical series $v_i(j)$ and $\lambda_i(j)$, with respect to j . The distance $D(v_i(j), \lambda_i(j))$ can be calculated using a DP.

DP matching is well known as a matching method for time series data, such as voice data, etc. When two sets of data are collated, the local features of data are focussed, and an evaluation function

indicating the quality of the entire matching is defined. Here, the distance between two sets of data is calculated from the value of this evaluation function.

5 Fig. 12 shows a DP matching method between a numerical series $\{x_1, x_2, \dots, x_n\}$ consisting of n numeric values and a numerical series $\{y_1, y_2, \dots, y_p\}$ consisting of p numeric values.

10 Here, the numerical series $\{x_1, x_2, \dots, x_n\}$ and $\{y_1, y_2, \dots, y_p\}$ are arranged on the x and y axes of a xy -coordinate plane, respectively, and the matching between the two numerical series are indicated by a plurality of dotted points on the plane. While an evaluation function $g(x_i, y_j)$ is calculated in order, 15 with a point (x_1, y_1) as a start point, according to a predetermined recurrence formula in a calculation area A , two points in the two different numerical series are matched. Then, the distance between the two numerical series can be obtained from $g(x_n, y_n)$.

20 Fig. 13 shows a calculation in which $g(x_i, y_j)$ is obtained from $g(x_{i-1}, y_j)$, $g(x_{i-1}, y_{j-1})$ and $g(x_{i-1}, y_{j-1})$ already obtained in the DP matching process. Here, for example, the following recurrence formula is used.

25 $g(x_i, y_j)$

$$\begin{aligned}
&= \min \{g(x_{i-1}, y_j) + d(x_{i-1}, y_j), \\
&\quad g(x_{i-1}, y_{j-1}) + 2*d(x_{i-1}, y_{j-1}), \\
&\quad g(x_i, y_{j-1}) + d(x_i, y_{j-1})\} \quad (4)
\end{aligned}$$

where $g(x_i, y_j)$ indicates the value of an evaluation
 5 function at the time of matching a partial numerical
 series $\{x_1, x_2, \dots, x_i\}$ with a partial numerical
 series $\{y_1, y_2, \dots, y_j\}$. $d(x_i, y_j)$ indicates a
 distance at the time of matching a numeric value x_i
 with a numeric value y_j , which can be obtained by the
 10 following formula.

$$d(x_i, y_j) = |x_i - y_j| \quad (5)$$

$\min\{\}$ indicates the minimum value of the three
 elements within $\{\}$. In this way, and with use of
 formula (4), only a matching between the partial
 15 numerical series $\{x_1, x_2, \dots, x_i\}$ and $\{y_1, y_2, \dots,$
 $y_j\}$ such that $g(x_i, y_j)$ is minimized, is adopted and
 $g(x_i, y_j)$ is stored.

By repeating such a calculation, the numerical
 series $\{x_1, x_2, \dots, x_n\}$ and $\{y_1, y_2, \dots, y_p\}$ are
 20 matched, and $g(x_n, y_p)$ can be obtained. Then, $g(x_n,$
 $y_p)/(n + p)$ is designated as a distance between the
 two numerical series. The shorter the distance, the
 more similar the two numerical series; and the longer
 the distance, the more different the two numerical
 25 series.

In this way, if a distance $D(v_i(j), \lambda_i(j))$ is calculated using a DP matching method, a distance $D(N, \Lambda)$ between two feature amounts can be obtained using formulas (1) and (3).

5 In DP matching, the combination of two numerical values has flexibility, and two numerical series can be non-linearly matched. Using this flexibility, the horizontal shift of the features of an image can be somewhat absorbed. In this way, the feature amount in
10 this embodiment can be used without a gradation process in the connecting direction of characters by replacing a conventional gradation process with DP matching in the distance calculation of feature amounts. For the distance calculation of the feature
15 amounts, an arbitrary non-linear matching method for which the shift of features can be absorbed, can also be used in addition to DP matching.

Next, its process flow is described using a concrete example of an input image. Here, a case where
20 the recognizing process of a part of "川崎市" in a character string image shown in Fig. 14 is completed and a part of "中原" is inputted in succession, is studied. At this time, the feature amount is extracted from the input image of "中原", and a feature collating
25 process is executed according to the procedural flow

shown in Fig. 15.

It is assumed that the words of "川崎", "幸", "中原", "高津", "宮前", "多摩" and "麻生" are registered in the word list 14 and the feature amount of all their characters are registered in the individual character dictionary 15.

First, the feature amount of "川" and "崎" are extracted from the individual character dictionary 15 according to the word list 14, and then the feature amount of "川崎" is composed (step S21). Then, the composed feature amount of "川崎" and the feature amount of the input image are collated, and a distance between the two feature amounts is stored (step S22). Then, the memory area for the feature amount of "川崎" is released (step S23).

Then, since "幸" is a one-character word, the feature amount of "幸" is extracted from the individual character dictionary 15 and is stored in the released memory area (step S24). Then, the feature amount of "幸" and the feature amount of the input image are collated, a distance between the two feature amounts is stored, and the memory area for the feature amount of "幸" is released (step S26).

Then, the feature amount of "中" and "原" are extracted from the individual character dictionary 15,

and the feature amount of "中原" is composed in the released memory area (step S27). Then, the composed feature amount of "中原" and the feature amount of the input image are collated, a distance between the two feature amounts is stored (step S28), and the memory area of the feature amount of "中原" is released (step S29).

Such a collation process is executed for all the words contained in the word list 14. When this collation process is completed, those words are outputted as the recognition result in ascending order of distance.

Although in Figs. 14 and 15, the processing of words consisting of kanji is described, words including hiragana, katakana, alphanumerics, symbols, etc., are also processed in the same way. In addition to Japanese, the same process can be applied to the word recognition of an arbitrary language, such as Chinese, Korean, English, German, French, etc.

Furthermore, in addition to word recognition, the present invention can be applied to the recognizing process of pattern strings consisting of one or more individual patterns. In this case, lists with registered pattern string recognition candidates, are prepared instead of word lists, and a dictionary in

which the feature amounts of individual patterns are registered is prepared instead of the individual character dictionary. Then, in the course of the recognition process of an image the feature amount of a pattern string is dynamically generated from the individual pattern dictionary, and the pattern string is collectively recognized.

The word recognizing apparatus shown in Fig. 2 can be configured using an information processing device (computer) shown in Fig. 16. The information processing device shown in Fig. 16 includes a CPU (central processing unit) 21, a memory 22, an input device 23, an output device 24, an external storage device 25, a medium driving device 26, a network connecting device 27 and an optical-electrical converting device 28, which are connected with each other using a bus 29.

The memory 22 includes, for example, a ROM (read only memory), a RAM (random access memory), etc., and stores programs and data to be used in the process. The CPU 21 executes necessary processes by running a program using the memory 22.

The feature extracting unit 11, feature collating unit 12 and feature generating unit 13 shown in Fig. 2 correspond to software components stored in the

specific program code segments of the memory 22. Both the word list 14 and the individual character dictionary 15 are stored in a specific area of memory 22 as data.

5 The input device 23 corresponds to, for example, a keyboard, a pointing device, a touch panel, etc., and is used for the input of instructions and information from a user. The output device 24 includes, for example, a display, a printer, a
10 speaker, etc., and is used for the output of inquiries and information to a user.

 The external storage device 25 corresponds to, for example, a magnetic disk device, an optical disk device, a magneto-optical disk device, etc., and
15 stores information. It is also possible for the above-mentioned programs and data to be stored in this external storage device and used by downloading them to the memory 22, if required.

 The medium driving device 26 drives a portable
20 storage medium 30, and accesses its recorded contents. For the portable storage medium 30, an arbitrary computer-readable storage medium, such as a memory card, a floppy disk, a CD-ROM (compact disk read only memory), an optical disk, a magneto-optical disk,
25 etc., is used. It is also possible that the above-

mentioned programs and data are stored in this portable storage medium 30 and are used by downloading them to the memory 22, if required.

The network connecting device 27 communicates with an external apparatus through an arbitrary network (line), such as a LAN (local area network), etc., and converts data during communication. If required, it is possible for the device 27 to receive the above-mentioned programs and data from the external apparatus and to use them by downloading them to the memory 22.

The optical-electrical converting device 28 corresponds to, for example, an image scanner, etc., and converts an image into digital data and inputs the data. The inputted image data are read into the memory 22, and the feature amount is extracted from the data.

Fig. 17 shows computer-readable recording media which can provide the information processing device shown in Fig. 26 with programs and data. The programs and data stored in the portable storage medium 30 or an external database 31 can be stored in the memory 22. Then, the CPU 21 runs the programs using the data, and executes necessary processes.

According to the present invention, a word can be collectively recognized, without restricting the

scope of words, by dynamically generating a word dictionary from an individual character dictionary. Accordingly, word recognition is available for arbitrary use.

- 5 Since the present invention adopts a non-linear matching method, such as DP matching, for the distance calculation of the feature amount and the method used to generate a mesh in the connecting direction of characters is made variable, and a certain degree of
- 10 recognition accuracy is also maintained in word recognition.

What is claimed is:

1. A word recognizing apparatus, comprising:

listing means for storing a list of at least one
word;

dictionary means for storing feature amounts of
a plurality of characters;

generating means for generating a feature amount
of a word stored in said listing means using the
feature amounts of characters stored in said
dictionary means; and

collating means for collating the generated
feature amount of the word with a feature amount of
a recognition target and outputting a recognition
result.

2. The word recognizing apparatus according to claim
1, wherein said collating means includes a memory
means which stores the feature amount of the word, and
releases the memory means when a collation of the
feature amount of the word is completed, and stores
a feature amount of the next word.

3. The word recognizing apparatus according to claim
1, further comprising:

inputting means for inputting an image as the recognition target; and

5 extracting means for performing a one-dimensional gradating conversion in a direction perpendicular to a connecting direction of characters for a direction code histogram of a contour line in each of a plurality of small areas in an inputted image and extracting a direction code histogram series obtained from a conversion result as the feature amount of the
10 recognition target.

4. The word recognizing apparatus according to claim 3, wherein said extracting means divides a length of the inputted image in the direction perpendicular to
15 the connecting direction of characters by a predetermined integer and divides the image into the small areas with an obtained quotient as a size of each of the small areas.

20 5. The word recognizing apparatus according to claim 1, wherein said generating means generates the feature amount of the word by using feature amounts of a plurality of characters.

25 6. The word recognizing apparatus according to claim

5, wherein said generating means generates a new direction code histogram series by arranging a plurality of direction code histogram series corresponding to the feature amounts of characters composing the word and designating a generated direction code histogram series as the feature amount of the word.

7. The word recognizing apparatus according to claim 1, wherein said collating means performs a non-linear matching of the feature amount of the word and the feature amount of the recognition target, and calculates a degree of similarity between the feature amount of the word and the feature amount of the recognition target.

8. The word recognizing apparatus according to claim 1, wherein said listing means stores a list which has a high possibility of containing a word corresponding to the recognition target.

9. A word recognizing apparatus, comprising:
generating means for dynamically generating a feature amount of a word using feature amounts of characters; and

collating means for collating the generated feature amount of the word with a feature amount of a recognition target, and for outputting a recognition result.

5

10. A recognizing apparatus, comprising:

generating means for dynamically generating a feature amount of a pattern string using feature amounts of patterns; and

10

collating means for collating the generated feature amount of the pattern string with a feature amount of a recognition target, and for outputting a recognition result.

15

11. A computer-readable storage medium on which is recorded a program causing a computer to execute a process, said process comprising the steps of:

dynamically generating a feature amount of a word using feature amounts of characters; and

20

collating the generated feature amount of the word with a feature amount of a recognition target.

25

12. A computer-readable storage medium on which is recorded a program causing a computer to execute a process, said process comprising the steps of:

5

13. A recognizing method, comprising the steps of:

10

amounts of a plurality of patterns;

15

collating the generated feature amount of the pattern string with a feature amount of a recognition target.

Abstract of the Disclosure

5 A word recognizing apparatus extracts the feature
amount from a given image, and dynamically composes
the feature amount of a candidate word to be
recognized which is registered in a word list, using
feature amounts of characters registered in an
individual character dictionary. Then, the apparatus
collates the composed feature amount of the word with
10 the feature amount extracted from the image,
calculates the degree of similarity between the two
feature amounts, and outputs a recognition result.

687750*46960360

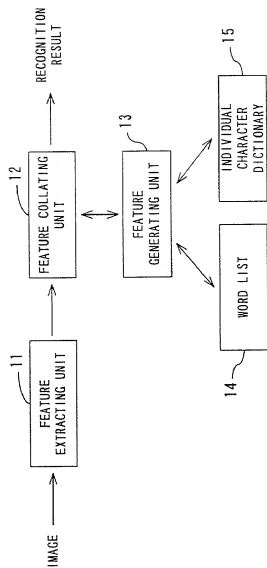


FIG. 2

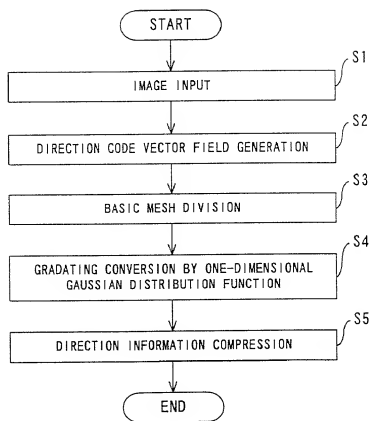


FIG. 3

09309894.051199

7	5	3
9	Ci	1
11	13	15

FIG. 4

•

FIG. 5




FIG. 6

0.017
0.105
0.194
0.105
0.017

FIG. 7

09309894-051200

$n = 13$

$M = 13$

$m = 7$

○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○
○	○	○	○	○	○	○	○	○	○	○	○	○

FIG. 8

060750-468060

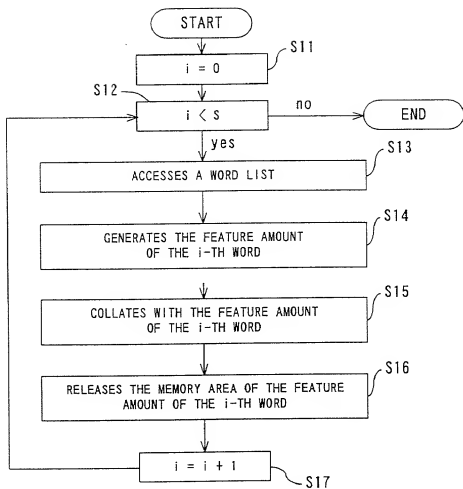


FIG. 11

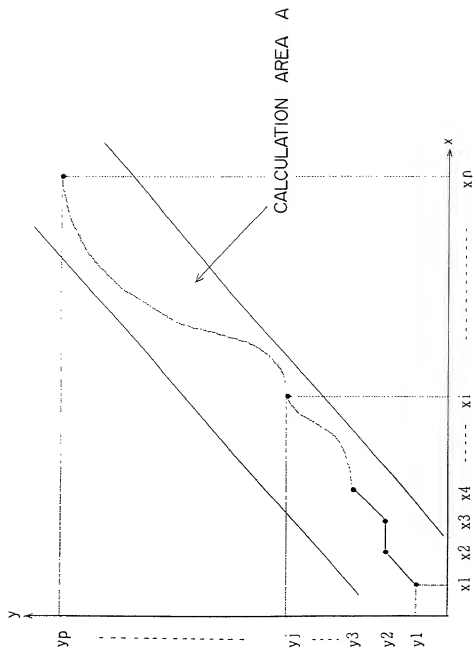


FIG. 12

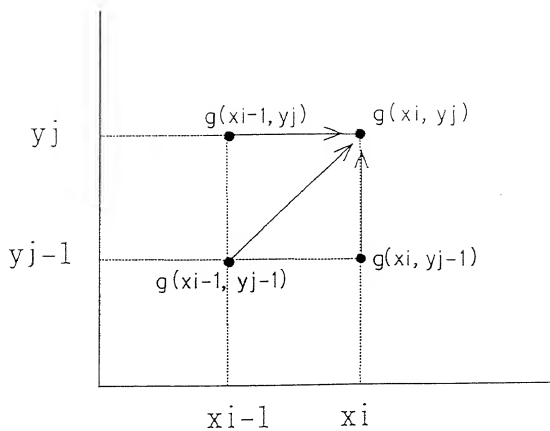


FIG. 13

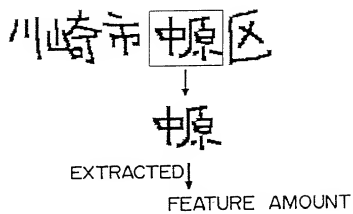


FIG. 14

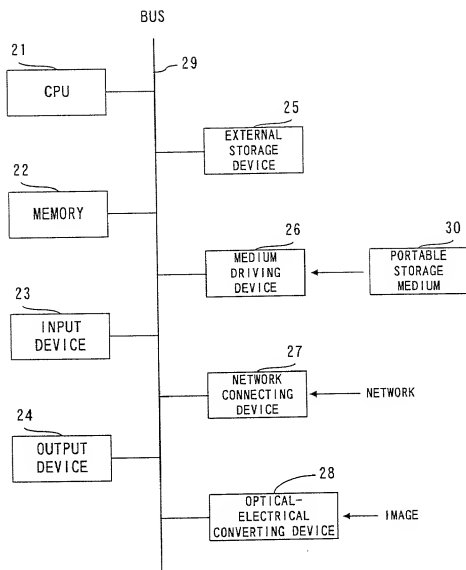


FIG. 16

66TSD'16860660

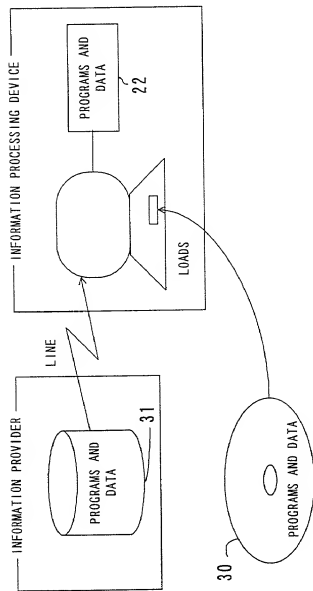


FIG. 17

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
WORD RECOGNIZING APPARATUS FOR
DYNAMICALLY GENERATING FEATURE
AMOUNT OF WORD AND METHOD THEREOF

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を、 とし、
（該当する場合） に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基き下記の、米国外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基き国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している。本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
 10-308943

(Number)

(番号)

(Number)

(番号)

Japan

(Country)

(国名)

(Country)

(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

☐

☐

29th/October/1998

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

私、第35編米国法典119条(e)項に基き下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基き下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基き権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外特許提出日以降で本出願の日本国内または特許協力条約国際提出日以降の期間中に入手された、連邦規則法典第37編1.56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基きいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基き表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編1001条に基き、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(状況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(状況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続を米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
人の氏名及び登録番号を明記のこと)

James D. Halsey, Jr., 22,729; Harry John Stasz, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,
30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.
Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756;
George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M.
Scherrier, 35,348 (agent)

書類送付先

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor
	Hiroaki TAKEBE
発明者の署名 日付	Inventor's signature Date
	Hiroaki Takebe April 20, 1999
住所	Residence
	Kanagawa, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka
	4-chome, Nakahara-ku, Kawasaki-shi,
	Kanagawa 211-8588, Japan
第二共同発明者	Full name of second joint inventor, if any
	Yoshinobu HOTTA
第二発明者 日付	Second inventor's signature Date
	Yoshinobu Hotta April 20, 1999
住所	Residence
	Kanagawa, Japan
国籍	Citizenship
	Japan
私書箱	Post Office Address
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka
	4-chome, Nakahara-ku, Kawasaki-shi,
	Kanagawa 211-8588, Japan

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Satoshi NAOI		
第三共同発明者	日付	Third inventor's signature <i>Satoshi Naoi</i>	Date April 20, 1999
住 所	Residence Kanagawa, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan		
第四共同発明者	Full name of fourth joint inventor, if any		
第四共同発明者	日付	Fourth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

第五共同発明者	Full name of fifth joint inventor, if any		
第五共同発明者	日付	Fifth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		
第六共同発明者	Full name of sixth joint inventor, if any		
第六共同発明者	日付	Sixth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第七以降の共同発明者についても同様に
記載し、署名をすること)

(Supply similar information and signature for
seventh and subsequent joint inventors.)